


UL 758 电器布线类

AWM3075 硅橡胶绝缘电线

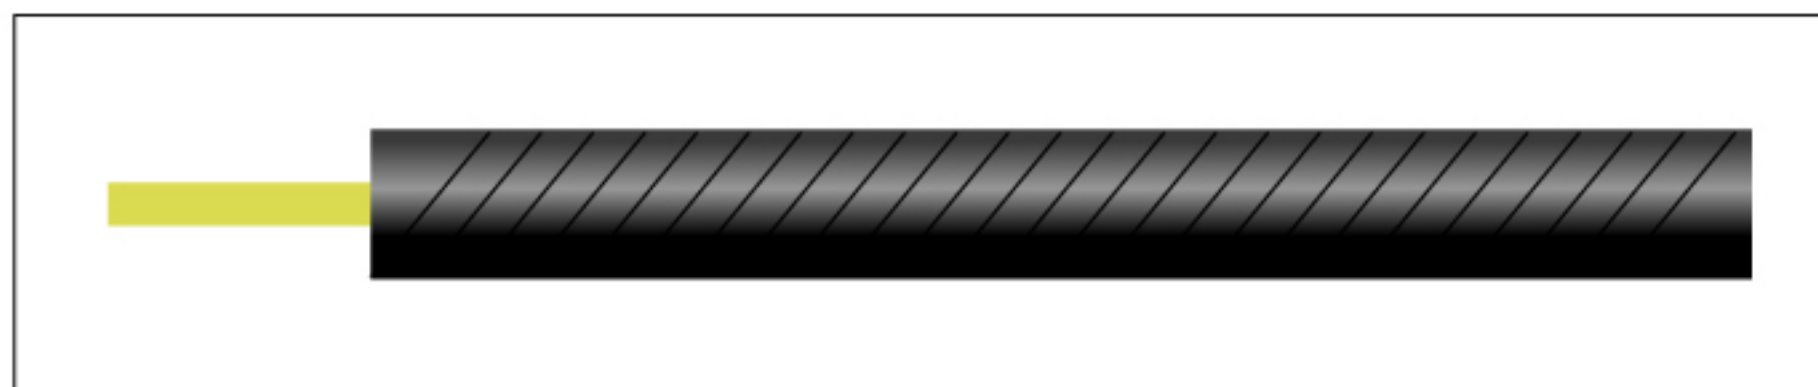

AWM 3075

线规 AWG	计算截面 Cross Section mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D. of Insulation/mm	成品外径 mm O.D. of Cable	20℃导体最大直 流电阻 Max. Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
		根数 No. of Strands	直径 Diameter/mm					
10	5.28	7	0.98	1.14	5.22	5.62	3.55	77

Product Construction:**Conductor:**

10AWG, solid or stranded, copper wire with the diameter of a single copper wire 0.015 in., or stranded nickel plated or silver plated conductor with a temperature rating of 200℃

Insulation:

200℃ silicone rubber, uniform, free stripping, easy to remove

Sheath:

Fiber glass braid

Print:

E186948 Ⅲ AWM3075 10AWG 200℃
600V I A C Ⅲ AWM3075 10AWG
200℃ 600V FT2 GENERAL CABLE
(JIANGYIN)

Applications:

Internal wiring of appliances

Compliance:

UL 758, UL 1581, UL 62
Designed to meet UL FT2 horizontal flame test
RoHS

Packaging:

Please contact Customer Service for packaging and color options.

产品结构:**导体:**

10AWG使用单丝直径大于或等于0.015in的单根或绞合导体或耐温等级达到200℃的 镀镍铜、镀银铜绞合导体

绝缘:

200℃ 硅橡胶绝缘,厚度均匀,易剥,易裁

护层:

玻璃纤维编织

表面印字:

E186948 Ⅲ AWM3075 10AWG 200℃
600V I A C Ⅲ AWM3075 10AWG
200℃ 600V FT2 GENERAL CABLE
(JIANGYIN)

用途:

电器内部布线。

执行标准:

UL 758, UL 1581, UL 62
通过 UL FT2水平燃烧实验
符合RoHS 标准

包装:

包装和颜色, 请咨询客服人员。