


UL 758电器布线类

AWM3122硅橡胶绝缘电线

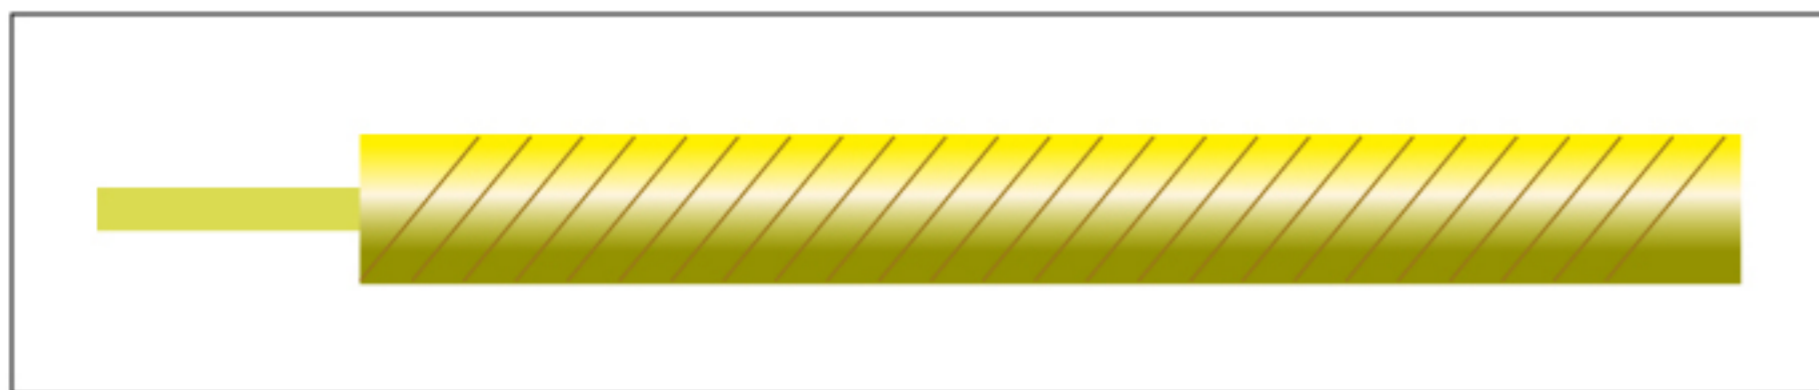

AWM 3122

线规 AWG	计算截面 Cross Section mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation /mm	成品外径 mm O.D.of Cable	20℃导体最大直 流电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
		根数 No.of Strands	直径 Diameter /mm					
26	0.13	1	0.404	0.381	1.166	1.64	143.00	5
24	0.21	1	0.511	0.381	1.273	1.75	89.30	6
22	0.32	1	0.643	0.381	1.405	1.88	56.40	8
20	0.56	7	0.32	0.381	1.722	2.20	37.40	11
	0.52	1	0.813	0.381	1.692	2.17	35.20	10
18	0.84	7	0.39	0.381	1.932	2.41	23.50	14
	0.82	1	1.02	0.381	1.782	2.26	22.20	13
16	1.31	1	1.29	0.381	2.052	2.53	14.00	19
	1.32	7	0.49	0.381	2.232	2.71	14.60	19

Product Construction:**Conductor:**

26 AWG thru 16 AWG, solid or stranded, copper wire with the diameter of a single copper wire 0.015 in., or stranded a nickel plated or silver plated conductor with a temperature rating of 200℃

Insulation:

200℃ silicone rubber, uniform, free stripping, easy to remove

Sheath:

Lacquered braid is optional

Print:

E186948 AWM3122 NO.AWG 200℃
300V I A C AWM3122
NO.AWG 200℃ 300V FT2 GENERAL
CABLE (JIANGYIN)

Applications:

Internal wiring of appliances

Compliance:

UL 758, UL 1581, UL 62
Designed to meet UL FT2 horizontal flame test
RoHS

Packaging:

Please contact Customer Service for
packaging and color options.

产品结构:**导体:**

26~16AWG使用单丝直径大于或等于0.015in的单根或绞合导体或耐温等级达到200℃的镀镍铜、镀银铜绞合导体

绝缘:

200℃ 硅橡胶绝缘,厚度均匀,易剥,易裁

护层:

可选涂漆编织层

表面印字:

E186948 AWM3122 NO.AWG 200℃
300V I A C AWM3122
NO.AWG 200℃ 300V FT2 GENERAL
CABLE (JIANGYIN)

用途:

电器内部布线。

执行标准:

UL 758, UL 1581, UL 62
通过 UL FT2水平燃烧实验
符合RoHS 标准

包装:

包装和颜色, 请咨询客服人员。