


UL 758 电器布线类 AWM3321 辐照交联聚烯烃绝缘电线

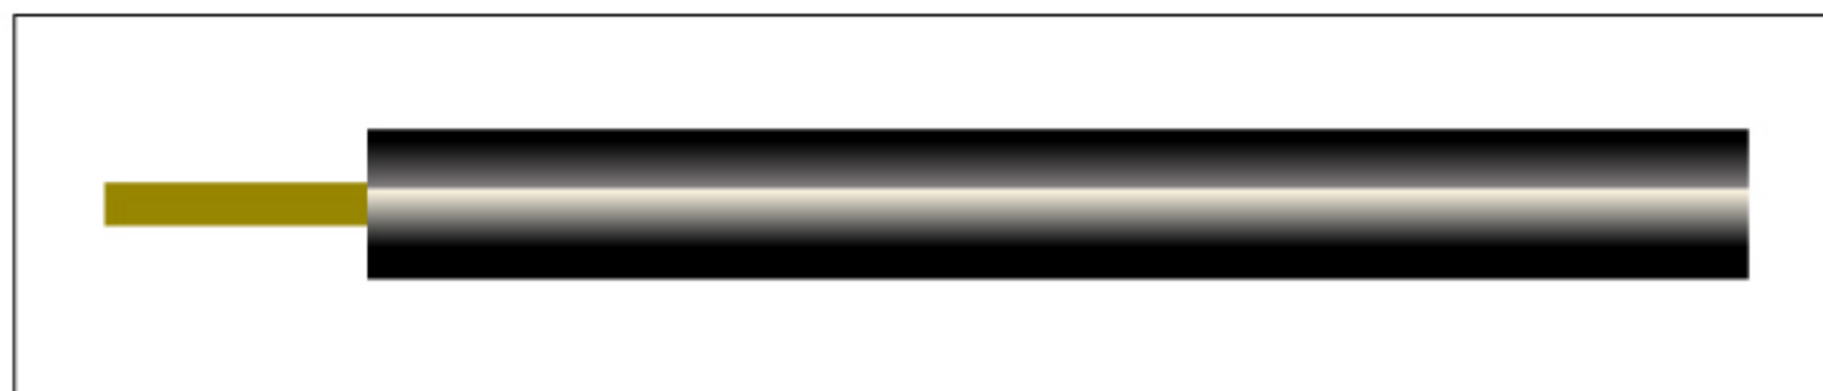

AWM 3321

线规 AWG	计算截面 Cross Section/mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness/mm	绝缘标称外径 Nominal O.D. of Insulation/mm	20℃导体最大直流 电阻 Max. Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
		根数 No. of Strands	直径 Diameter/mm				
12	3.30	41	0.32	0.762	3.92	5.75	41
	3.29	65	0.254	0.762	3.92	5.75	41
11	4.12	84	0.25	0.762	4.52	4.48	50
	3.96	56	0.3	0.762	4.46	4.48	49
10	5.50	112	0.25	0.762	5.00	3.55	65
	5.32	105	0.254	0.762	4.98	3.55	63
	5.94	84	0.3	0.762	5.12	3.55	69
9	6.53	133	0.25	0.762	5.27	2.82	76
8	8.25	168	0.25	1.14	6.53	2.23	103
6	13.06	266	0.25	1.14	7.58	1.41	152
5	16.67	329	0.254	1.14	8.28	1.11	188
4	21.45	437	0.25	1.14	9.08	0.882	235
	21.11	168	0.4	1.14	9.00	0.882	232
3	26.39	210	0.4	1.52	10.74	0.700	303
2	37.92	2146	0.15	1.52	12.29	0.555	425
	33.71	1073	0.2	1.52	11.54	0.555	381
1	42.98	342	0.4	2.03	13.86	0.440	499
1/0	53.56	666	0.32	2.03	15.13	0.349	606
	53.48	665	0.32	2.03	15.13	0.349	605
2/0	67.86	540	0.4	2.03	16.70	0.276	750
3/0	83.57	665	0.4	2.03	17.71	0.219	901
4/0	106.94	851	0.4	2.03	19.46	0.174	1129