


UL 758 电器布线类

SPT-1 整体式热塑性绝缘平行软线

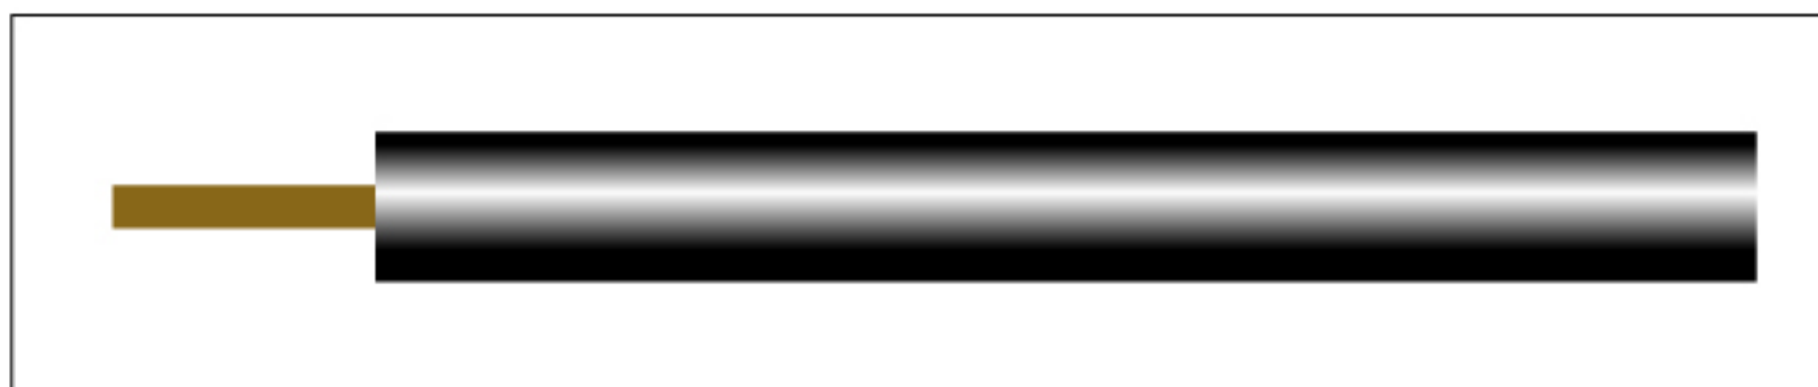

SPT-1 无接地线芯整体式热塑性绝缘平行软线

SPT-1 Non-Earthing Core, Integral, Thermoplastic Insulation, Parallel, Flexible Cable

| 线规 AWG | 计算截面 Cross Section mm ² | 导体结构 Conductor | | 绝缘厚度 Insulation Thickness /mm | 绝缘标称外径 Nominal O.D. of Insulation/mm | 20℃导体最大直 流电阻 Max. Resistance at 20℃Ω/km | 参考重量 Nominal Weight kg/km |
|-----------|---|-------------------------|-----------------------|--|--|--|------------------------------------|
| | | 根数 No. of Strands | 直径 Diameter /mm | | | | |
| 2*20 | 0.52 | 26 | 0.16 | 0.762 | 2.48×4.58 | 34.60 | 23 |
| 3*20 | 0.52 | 26 | 0.16 | 0.762 | 2.48×6.68 | 34.60 | 35 |
| 2*18 | 0.82 | 41 | 0.16 | 0.762 | 2.69×5.0 | 21.80 | 30 |
| 3*18 | 0.82 | 41 | 0.16 | 0.762 | 2.69×7.31 | 21.80 | 46 |

Product Construction:

Conductor:

20 AWG thru 18 AWG, stranded, with the maximum diameter of single wire 34 AWG (0.16mm), while the minum is 40AWG (0.079mm) (THIS DOESN'T MAKE SENSE)

Insulation:

PVC, uniform, free stripping, easy to remove. Passes ULQMMT2

Print:

E304165 (UL) SPT-1
NO.20AWG*NC~18AWG*NC 60℃ OR 75℃
OR 105℃ 300V VW-1 C(UL)
TYPE SPT-1 NO.20AWG*NC~
18AWG*NC 60℃ OR 75℃ OR 105℃
300V FT1 GENERAL CABLE
(JIANGYIN)

Applications:

Fixture Wire

Compliance:

UL 758, UL 1581, UL 62, CSA-C22.2
SPT-1 20 AWG - 18 AWG 60℃ or 75℃ or
105℃ 300V PVC
Designed to meet UL VW-1 vertical flame test
RoHS

Packaging:

Please contact Customer Service for packaging and color options.

产品结构:

导体:

20 AWG - 18 AWG 使用单丝直径最大为 34AWG(0.16mm)最小为36AWG (0.127mm) 的绞合导体, 20AWG可使用最小单丝直径为 40AWG(0.079mm) 的绞合导体

绝缘:

使用通过ULQMMT2认证的聚氯乙烯绝缘,厚度均匀,易剥,易裁

表面印字:

E304165 (UL) SPT-1
NO.20AWG*NC~18AWG*NC 60? OR 75℃
OR 105℃ 300V VW-1 C(UL)
TYPE SPT-1 NO.20AWG*NC~
18AWG*NC 60℃ OR 75℃ OR 105℃
300V FT1 GENERAL CABLE
(JIANGYIN)

用途:

连接线

执行标准:

UL 758, UL 1581, UL 62, CSA-C22.2
SPT-1 20 AWG - 18 AWG 60℃ or 75℃ or
105℃ 300V PVC
通过 UL VW-1垂直燃烧试验
符合RoHS 标准

包装:

包装和颜色, 请咨询客服人员。

