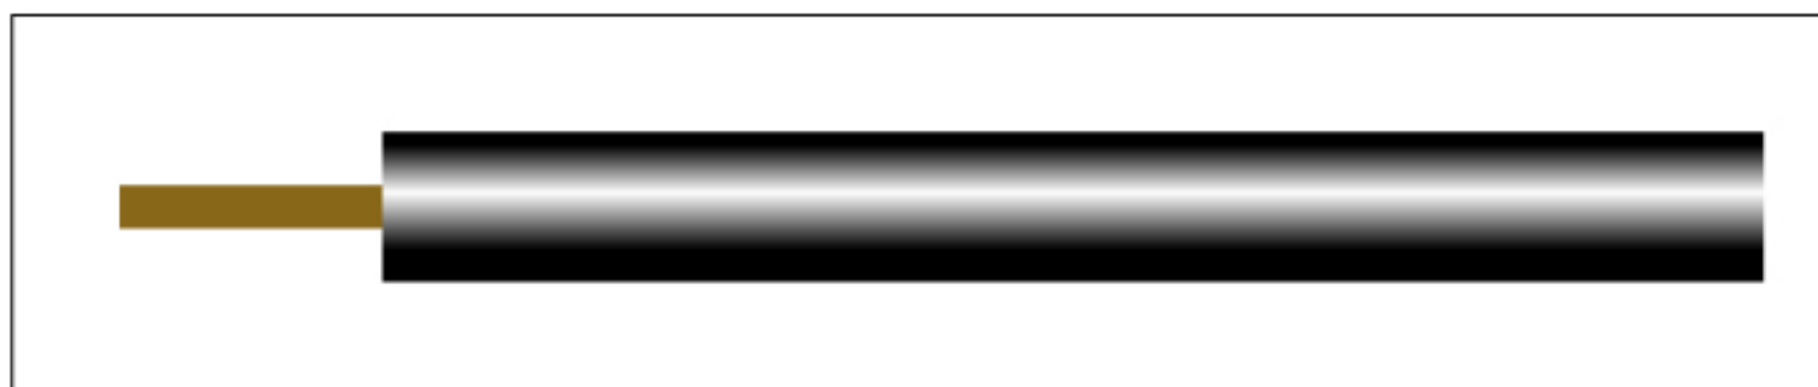


汽车线类

AEX汽车用耐热低压电缆

**Product Construction:****Insulation:**

PVC

Applications:

Low-voltage, thin wall insulated cable for automotive applications

Compliance:

JASO D 608

AEX- 120°C

Packaging:

Please contact Customer Service for packaging and color options.

AEX汽车用辐照交联聚烯烃耐热低压电缆**AEX - XLPE Insulated, Heat-Resistant, Low-Tension Cable for Automotive Applications**

标称截面 Cross Section /mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation/mm	20℃导体最大直流 电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 Diameter/mm				
0.5f	20	0.18	0.50	2.00	38.60	9
0.5	7	0.32	0.50	1.95	34.60	9
0.75f	30	0.18	0.50	2.14	25.80	11
0.85	11	0.32	0.50	2.23	22.00	12
1.25f	50	0.18	0.60	2.70	15.50	18
1.25	16	0.32	0.60	2.70	15.10	18
2	26	0.32	0.60	3.08	9.30	27
3	41	0.32	0.70	3.80	5.90	42
5	65	0.32	0.80	4.60	3.72	63
8	50	0.45	0.80	5.30	2.45	91

f表示线芯为软结构

"f" indicates flexible structure

产品结构:**绝缘:**

聚氯乙烯绝缘

用途:

汽车用薄壁绝缘低压电缆

执行标准:

JASO D 608

AEX- 120°C

包装:

包装和颜色, 请咨询客服人员。