


汽车线类

AVX汽车用耐热低压电缆

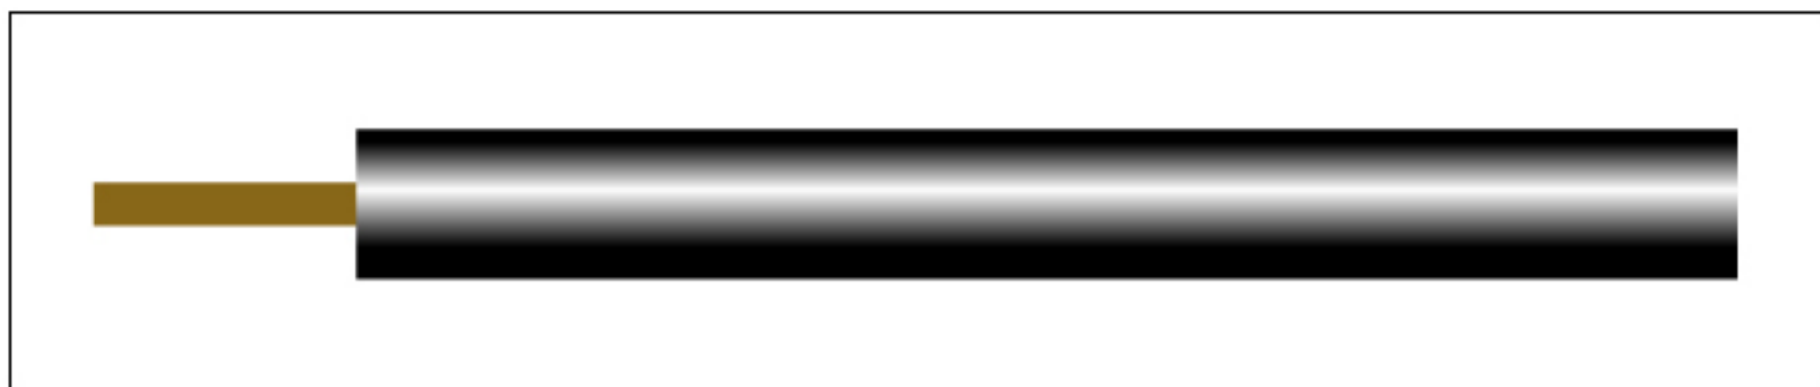

AVX汽车用交联聚氯乙烯耐热低压电缆

AVX - XL-PVC Insulated, Heat-Resistant, Low-Tension Cable for Automotive Applications

标称截面 Cross Section /mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation/mm	20℃导体最大直流 电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 Diameter/mm				
0.5f	20	0.18	0.5	2.00	38.60	9
0.5	7	0.32	0.5	2.00	34.60	9
0.75f	30	0.18	0.5	2.10	25.80	12
0.85	11	0.32	0.5	2.20	22.00	13
1.25f	50	0.18	0.6	2.70	15.50	18
1.25	16	0.32	0.6	2.70	15.10	18
2	26	0.32	0.6	3.08	9.30	28
3	41	0.32	0.7	3.30	5.90	44
5	65	0.32	0.8	4.00	3.72	67
8	50	0.45	0.8	4.60	2.45	97

f表示线芯为软结构
"f" indicates flexible structure

Production Construction:**Insulation:**

XL-PVC

Applications:

Low-voltage, heat-resistant cable for automotive applications

Compliance:

JASO D 608

Packaging:

Please contact Customer Service for packaging and color options.

产品结构:**绝缘:**

辐照交联 聚氯乙烯绝缘

用途:

汽车用耐热低压电缆

执行标准:

JB 6213 JASO D 608

包装:

包装和颜色, 请咨询客服人员。