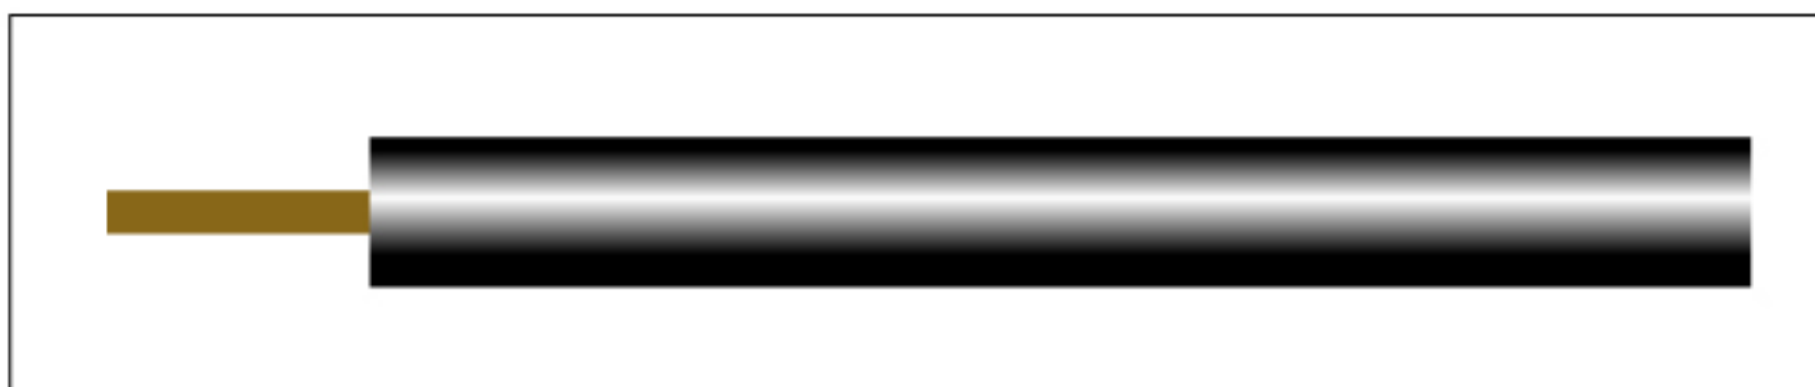


## 汽车线类

## AV汽车用PVC绝缘电缆

**Product Construction:**

**Insulation:**  
PVC

**Applications:**  
Low-voltage cable for automotive applications

**Compliance:**  
JIS C 3046  
AV-105°C

**Packaging:**  
Please contact Customer Service for packaging and color options.

AV汽车用低压电线  
**AV - Low-Tension Cable for Automotive Applications**

标称截面 Cross Section /mm <sup>2</sup>	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D. of Insulation/mm	20°C导体最大直流 电阻 Max. Resistance at 20°CΩ/km	参考重量 Nominal Weight kg/km
	根数 No. of Strands	直径 Diameter/mm				
0.5f	20	0.18	0.60	2.20	36.70	10
0.5	7	0.32	0.60	2.20	32.70	10
0.75f	30	0.18	0.60	2.40	24.40	13
0.85	11	0.32	0.60	2.40	20.80	14
1.25f	50	0.18	0.60	2.70	14.70	18
1.25	16	0.32	0.60	2.70	14.30	18
2	26	0.32	0.60	3.10	8.81	25
3	41	0.32	0.70	3.80	5.59	42
5	65	0.32	0.80	4.70	3.52	63
8	50	0.45	0.90	5.60	2.32	93
15	84	0.48	1.10	7.00	1.38	172
20	41	0.8	1.10	8.20	0.887	232
30	70	0.8	1.40	10.80	0.520	393
40	85	0.8	1.40	11.40	0.428	466
50	108	0.8	1.60	13.00	0.337	595
60	127	0.8	1.60	13.60	0.287	686
85	169	0.8	2.00	16.00	0.215	927
100	217	0.8	2.00	17.60	0.168	1164

f表示线芯为软结构  
"f" indicates flexible structure

**产品结构:**

**绝缘:**  
聚氯乙烯绝缘

**用途:**  
汽车用低压电缆

**执行标准:**  
JIS C 3046  
AV-105°C

**包装:**  
包装和颜色, 请咨询客服人员。