


汽车线类

FL2G汽车用硅胶绝缘电缆

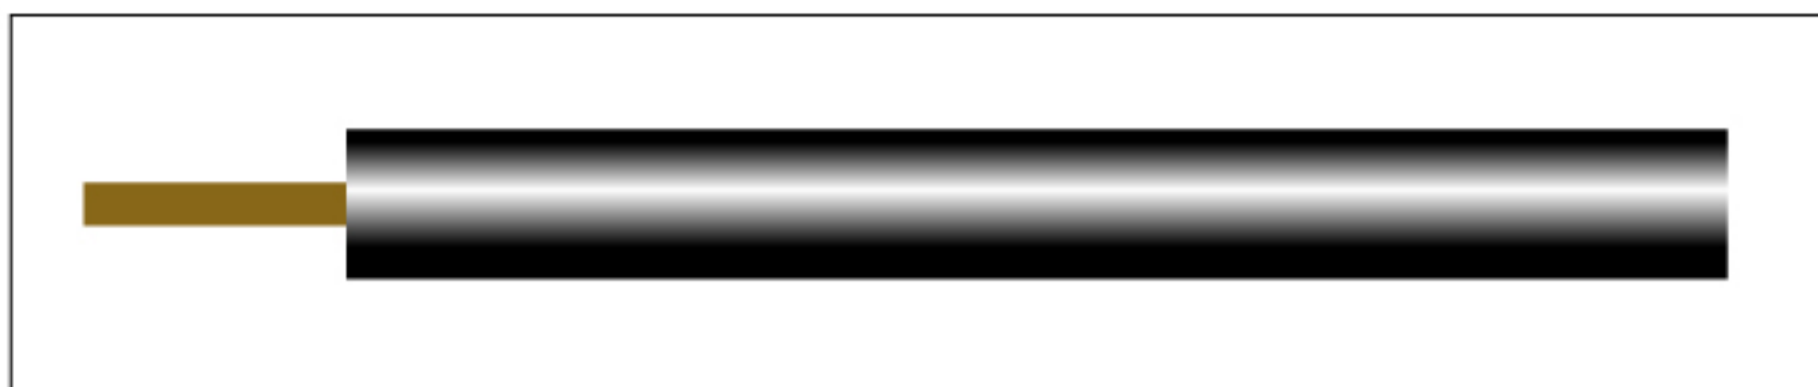

FL2G 道路车辆—低压电缆
FL2G - Low-Voltage Cable for Vehicles

标称截面 Cross Section /mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation/mm	20℃导体最大直流 电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 Diameter/mm				
0.5	16	0.2	0.6	2.12	37.10	9
0.75	24	0.2	0.6	2.34	24.70	12
1.0	32	0.2	0.6	2.52	18.50	15
1.5	30	0.25	0.6	2.80	12.70	20
2.5	50	0.25	0.7	3.44	7.60	32
4	56	0.3	0.8	4.35	4.71	49
6	84	0.3	0.8	4.90	3.14	69
10	80	0.4	1.0	6.50	1.82	118
16	126	0.4	1.0	7.70	1.16	184
25	196	0.4	1.3	10.0	0.743	282
35	276	0.4	1.3	11.1	0.527	385
50	396	0.4	1.5	13.5	0.368	535
70	555	0.4	1.5	15.3	0.259	184
95	475	0.5	1.6	17.7	0.196	235
120	608	0.5	1.6	19.5	0.153	253

Product Construction:**Insulation:**

Silicone rubber

Applications:

Low-voltage cable for vehicles

Compliance:

ISO 6722

FL2G - 180℃

Packaging:

Please contact Customer Service for packaging and color options.

产品结构:**绝缘:**

硅橡胶绝缘

用途:

道路车辆用低压电缆

执行标准:

ISO 6722

FL2G - 180℃

包装:

包装和颜色, 请咨询客服人员。