


## 电机引接线类

## JHXG硅橡胶绝缘玻璃丝编织电机引接线

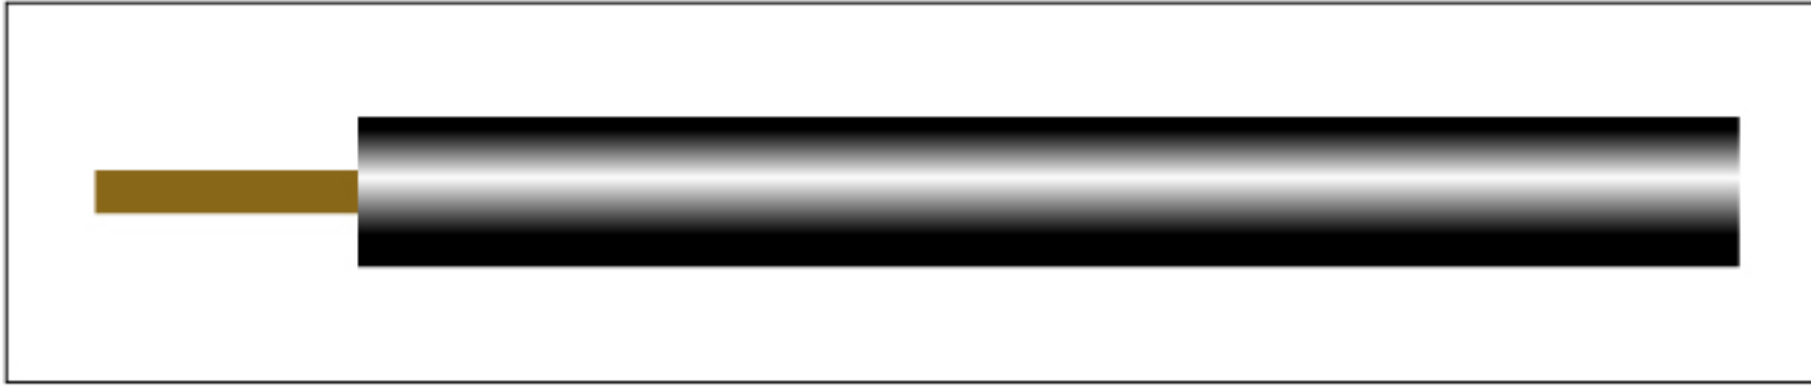

JHXG硅橡胶绝缘电机引接线  
JHXG -Silicone Rubber Insulated Motor Lead Wire

标称截面 Cross Section/mm <sup>2</sup>	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation/mm	20℃导体最大直流 电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 Diameter/mm				
0.75	24	0.2	1.0	3.14	26.7	17
1.0	32	0.2	1.0	3.32	20.0	20
1.5	30	0.25	1.0	3.6	13.7	26
2.5	49	0.25	1.0	4.1	8.21	37
4	56	0.3	1.0	4.9	5.09	56
6	84	0.3	1.0	5.6	3.39	78
10	84	0.4	1.0	6.6	1.95	127
16	126	0.4	1.4	8.5	1.24	198
25	196	0.4	1.6	10.6	0.795	303
35	276	0.4	1.6	11.7	0.565	406
50	396	0.4	1.8	14.1	0.393	593
70	361	0.5	1.8	16	0.277	815
95	475	0.5	2.1	18.7	0.210	1080
108	551	0.5	2.5	20.5	0.180	1274
120	962	0.4	2.4	21.2	0.164	1399
150	756	0.5	2.6	23.2	0.132	1708
185	925	0.5	2.8	25.6	0.108	2082
240	1221	0.5	3.0	29	0.0817	2719
270	1369	0.5	3.2	31	0.0689	3058
300	1517	0.5	3.2	32.3	0.0620	3363