


橡皮绝缘电缆类

YGZ中型耐热硅橡胶绝缘电线

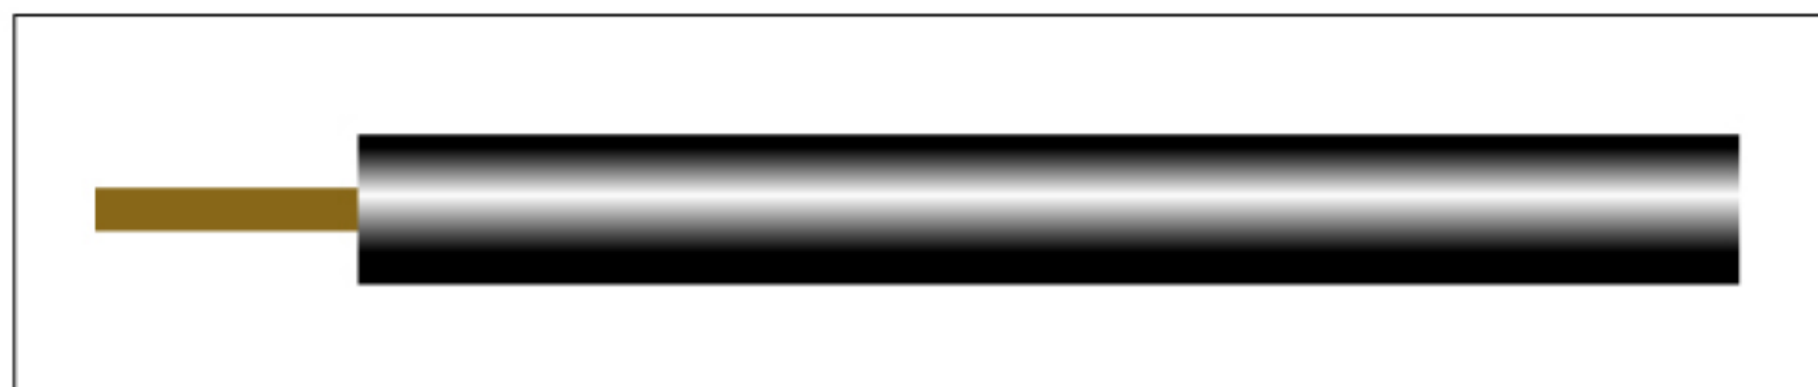

Product Construction:

Features:

Voltage rating :
U0/U 300/500V
Maximum continuous operating temperature is 180℃, while the minimum temperature is -40℃

Applications:

Applicable for all kinds of moveable electric equipment.

Compliance:

Q/320281ABM003-2004

产品描述

使用特性

电缆额定电压为U0/U 300/500V
电缆的连续运行导体最高温度为180℃，最低使用温度为-40℃。

用途:

适用于各种移动电器设备

产品执行标准:

Q/320281ABM003-2004

中型耐热硅橡胶套软电缆 YGZ
YGZ - Medium-Type, Heat-Resistant, Silicone Rubber, Flexible Cable

标称截面 Cross Section /mm ²	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D.of Insulation/mm	护套厚度 mm Sheath Thickness	护套标称外径 mm Nominal O.D.of Sheath	20℃导体最大直 流电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 /mm Diameter						
2 x 0.75	24	0.2	0.6	2.34	0.8	6.28	26.7	53
2 x 1.0	32	0.2	0.6	2.52	0.9	6.84	20.0	64
2 x 1.5	30	0.25	0.7	3.0	1.0	8.0	13.7	86
2 x 2.5	49	0.25	0.8	3.7	1.1	9.6	8.21	120
3 x 0.75	24	0.2	0.6	2.34	0.9	6.84	26.7	73
3 x 1.0	32	0.2	0.6	2.52	0.9	7.23	20.0	84
3 x 1.5	30	0.25	0.7	3.0	1.0	8.46	13.7	118
3 x 2.5	49	0.25	0.8	3.7	1.1	10.17	8.21	174
4 x 0.75	24	0.2	0.6	2.34	0.9	7.45	26.7	94
4 x 1.0	32	0.2	0.6	2.52	0.9	7.88	20.0	109
4 x 1.5	30	0.25	0.7	3.0	1.1	9.44	13.7	156
4 x 2.5	49	0.25	0.8	3.7	1.2	11.33	8.21	230
5 x 0.75	24	0.2	0.6	2.34	1.0	8.32	26.7	116
5 x 1.0	32	0.2	0.6	2.52	1.0	8.80	20.0	132
5 x 1.5	30	0.25	0.7	3.0	1.1	10.30	13.7	185
5 x 2.5	49	0.25	0.8	3.7	1.3	12.59	8.21	279