


橡皮绝缘电缆类

YG 245 IEC 03 (YG) 耐热硅橡胶绝缘电线

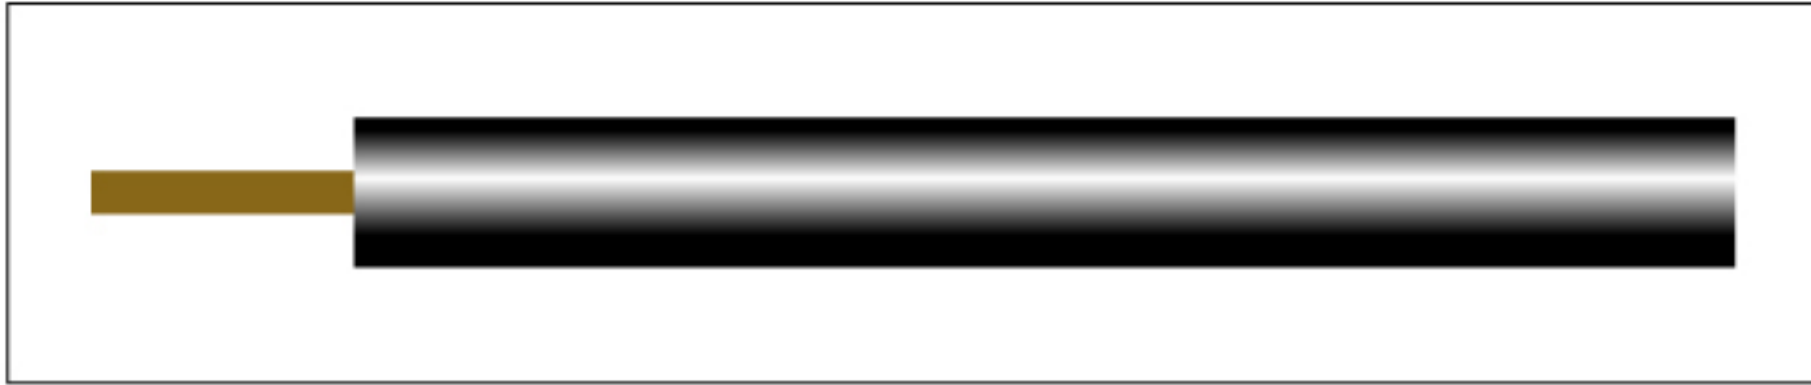

耐热硅橡胶绝缘电缆 245 IEC 03 (YG)
Heat-Resistant, Silicone Rubber Insulated Cable 245 IEC 03 (YG)

标称截面 Cross Section /mm ²	导体结构 Conductor		绝缘最小厚度 mm Min. Insulation Thickness	电缆最大外径 / mm Max O.D.of Cable	20℃导体最大直流 电阻 Max.Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No.of Strands	直径 Diameter/mm				
0.5	16	0.2	0.6	3.4	40.1	12
0.75	24	0.2	0.6	3.6	26.7	15
1.0	32	0.2	0.6	3.8	20.0	18
1.5	30	0.25	0.7	4.3	13.7	25
2.5	49	0.25	0.8	5.0	8.21	38
4	56	0.3	0.8	5.6	5.09	56
6	84	0.3	0.8	6.2	3.39	78
10	84	0.4	1.0	8.2	1.95	132
16	126	0.4	1.0	9.6	1.24	187

Product Construction:**Conductor:**

single tinned or bare copper wire

Insulation:

heat-resistant silicone rubber

Sheath:

fiber glass braid

Compliance:

GB 5013.3-1997 idt IEC 245-3:1994

YG - 180℃, 300V/500V

Packaging:

Please contact Customer Service for packaging and color options.

产品结构:**导体:**

单线为镀锡铜丝 (也可以不镀锡)

绝缘:

耐热硅橡胶绝缘

护层:

玻璃纤维编织

执行标准:

GB 5013.3-1997 idt IEC 245-3:1994

YG -180℃, 300/500V

包装:

包装和颜色, 请咨询客服人员。