


## 汽车线类

## QGR硅胶绝缘汽车线

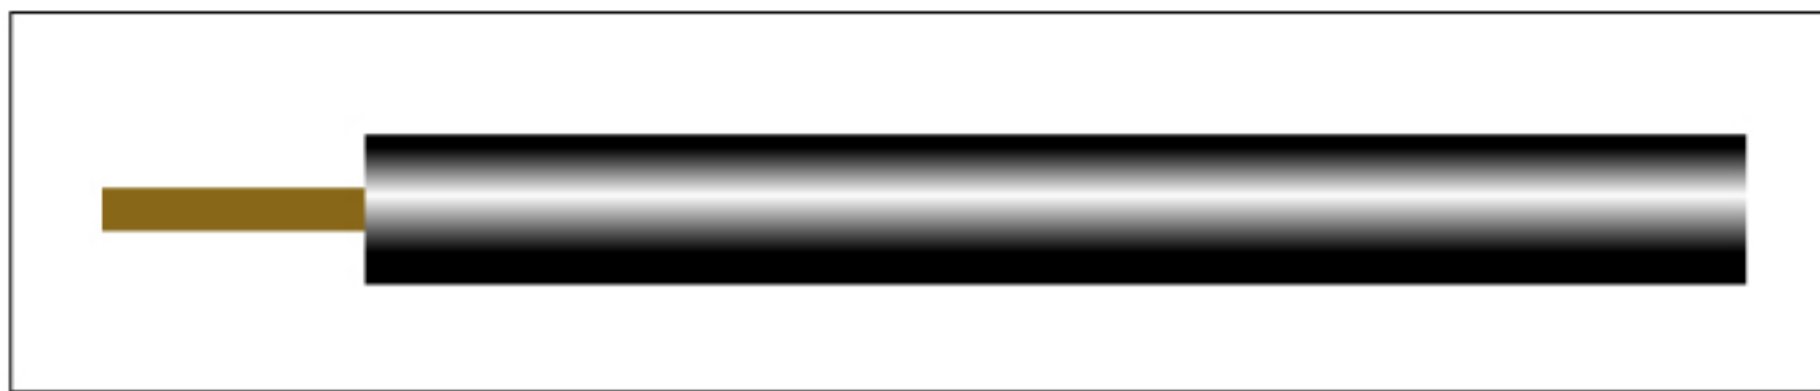

QGR汽车用硅橡胶电线

QGR - Silicone Rubber Insulated Automotive Cable

标称截面 mm <sup>2</sup>	导体结构 Conductor		绝缘厚度 Insulation Thickness /mm	绝缘标称外径 Nominal O.D. of Insulation/mm	20℃导体最大直流 电阻 Max. Resistance at 20℃Ω/km	参考重量 Nominal Weight kg/km
	根数 No. of Strands	直径 Diameter/mm				
0.5	28	0.15	0.6	2.13	37.1	9
0.75	24	0.2	0.6	2.34	24.7	12
1.0	32	0.2	0.6	2.52	18.5	15
1.25	40	0.2	0.6	2.66	14.7	17
1.5	30	0.25	0.6	2.8	12.7	20
2	64	0.2	0.7	3.23	9.42	26
2.5	50	0.25	0.7	3.5	7.6	31
3	60	0.254	0.8	3.87	6.0	38
4	140	0.195	0.8	4.3	4.71	51
	56	0.3	0.8	4.3	4.71	49
6	84	0.3	0.8	4.9	3.14	68
10	322	0.195	1.0	6.6	1.82	112
16	126	0.4	1.0	7.7	1.16	179
25	196	0.4	1.0	9.4	0.743	275
35	276	0.4	1.0	10.5	0.527	375